


TFT.-16/17..

Connector heads for earthing rod.

Application:

- Head/rod connection obtained by conical press-fitting with force.
- Head/cable connection made by striking a stainless steel peg located in the upper part of the head. This strike guarantees the connection head/ posts and head/cable.
- For earthing rods: Ø 17,3 mm copper-steel and Ø 16 mm stainless-steel.
- Model TFTI-16/17: the head/rod connection fits inside the earthing rod.

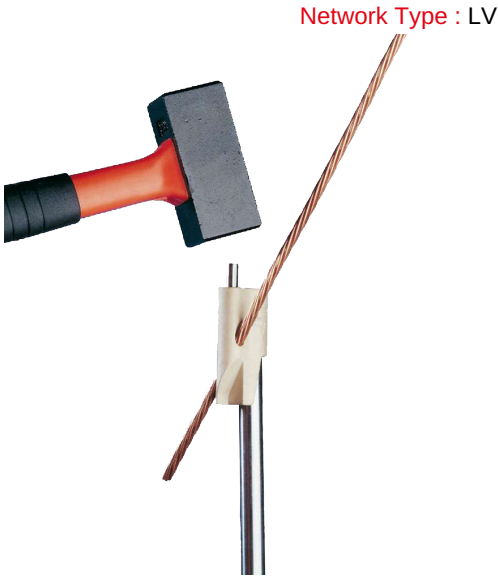

Ref	Description	Connector	Fitting	Type	Height	Material	Capacity
	Mounting						
TFTT-16/17	Piquet cuivre acier D. 17,3 mm et acier inox D. 16 mm	Câblette cuivre passante tangentiellement 25 ou 29 mm2	Piquet cuivre acier D. 17,3 mm et acier	Tangential running through copper cable 25-29 mm²	75	Bronze	Cu 25 / 29 mm²