

MP-32-1. / MP-33


Flexible conductor protector

Application:

- Insulating elastomer protector for bare LV overhead lines conductors.

Features:

- Soft elastomer material.
- Omega shape.
- Overlapping assembly.
- For bare conductors up to 16 mm diameter.

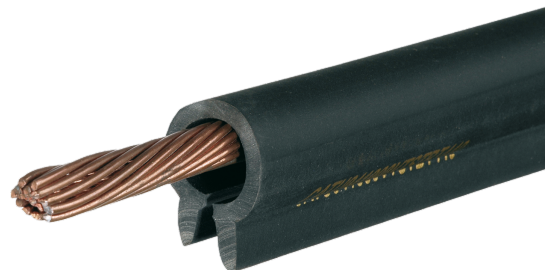

Reference	Description	Length (mm)	Voltage	
	Battery		Operating Voltage AC	Operating Voltage DC
MP-32/15		1500	1 000 V	1 500 V