


TFT.-16/17..

Connector heads for earthing rod.

Application:

- Head/rod connection obtained by conical press-fitting with force.
- Head/cable connection made by striking a stainless steel peg located in the upper part of the head. This strike guarantees the connection head/ posts and head/cable.
- For earthing rods: Ø 17,3 mm copper-steel and Ø 16 mm stainless-steel.
- Model TFTI-16/17: the head/rod connection fits inside the earthing rod.

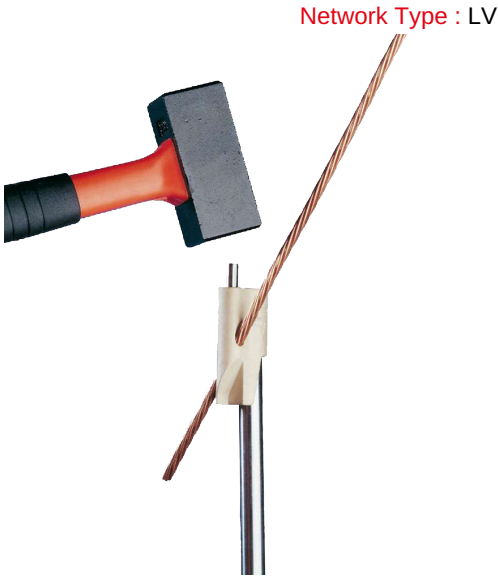

Ref	Description	Connector	Fitting	Type	Height	Material	Capacity
	Mounting						
TFTT-16/17	Piquet cuivre acier D. 17,3 mm et acier inox D. 16 mm	Câblette cuivre passante tangentiellement 25 ou 29 mm ²	Piquet cuivre acier D. 17,3 mm et acier	Tangential running through copper cable 25-29 mm ²	75	Bronze	Cu 25 / 29 mm ²