



Standards IEC 61482-2 APC 1 & ATPV 12 cal/cm² ISO 11612 A B1 C1 F1 ISO 11611 class 1 EN 1149-5 NFPA 70E - ASTM F1959

AFG-1001-...


CAT'ARC multi-risk coverall to protect against electric arc APC1 ATPV 12 cal/cm²

Application:

- · Multi-risk protection: protection against thermal hazards of an electric arc, heat and flames, welding hazards and antistatic.
- Prevention of the worsening of an accident by quickly and easly removing the coverall thanks to the red anti-panic zip.
- Adjustable to all body types: elastic waist, adjustable lenght of inner leg (77 cm or 82 cm).

Features:

- A high collar and adjustable cuffs improve the coverall's high protection.
- · Hard-wearing coverall thanks to the reinforcements at the knees, crotch and bottom of the zipper.
- Numerous features: 1 chest band, 2 chest pockets, 2 Italian pockets, 2 cargot pockets.
- Standard pictograms clearly visible on the left sleeve.

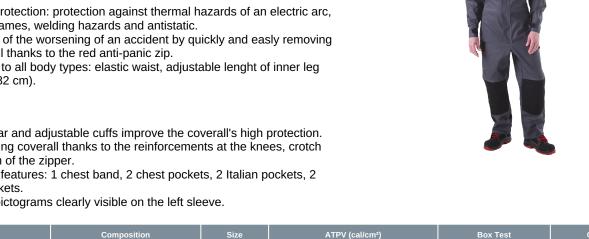

Reference	Composition	Size	ATPV (cal/cm²)	Box Test	Couleur
AFG-1001-XS	Coverall	XS	12	APC 1	
AFG-1001-S	Coverall	S	12	APC 1	□
AFG-1001-M	Coverall	М	12	APC 1	•
AFG-1001-L	Coverall	L	12	APC 1	□
AFG-1001-XL	Coverall	XL	12	APC 1	•
AFG-1001-2XL	Coverall	2XL	12	APC 1	□
AFG-1001-3XL	Coverall	3XL	12	APC 1	•
AFG-1001-4XL	Coverall	4XL	12	APC 1	□
AFG-1001-5XL	Coverall	5XL	12	APC 1	■

Last Modification: 07/21/2025

