

## M-24-...


Vinyl sheathed copper cable for MALT/CC

### Application :

- Earthing and short-circuiting cables.

### Features :

- Material : Copper with insulating sheath in extra flexible PVC ST11 grade.
- Transparent insulating sheath.
- Minimum bending radius: 4 times the cable diameter.
- Operating temperatures: -40°C to +60°C.
- Standard marking every 500 mm.
- Delivered by 5 m min.

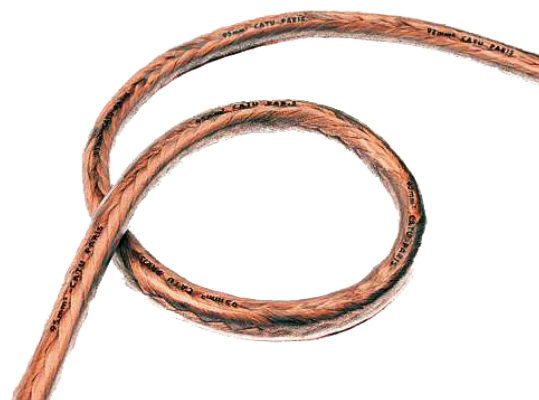

| Ref      | ICC (kA/1s) | Material |
|----------|-------------|----------|
| M-24-150 | 42.5        | Cuivre   |