

## M-24-...-S


Silicon sheathed copper cable for MALT/CC

### Application :

- Earthing and short-circuiting cables.

### Features :

- Conform to IEC 61230.
- Material: multi-stranded copper with extra flexible silicone insulation.
- Operating temperatures: -40°C to +60°C.
- Standard marking every 500 mm.
- Delivered by 5 m min.

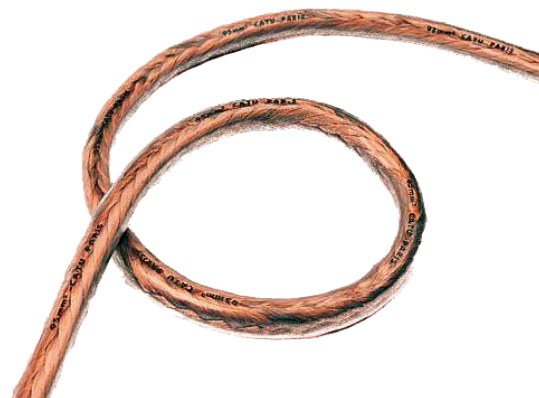

| Ref       | ICC (kA/1s) | Material |
|-----------|-------------|----------|
| M-24-70-S | 16          | Cuivre   |