

PP-4-38-...

Insulating safety padlock with retaining key, nylon shackle H $38 \text{ mm} \ \emptyset \ 4 \text{ mm}$


Application:

- For locking the separating devices (e.g. circuit breakers) to prevent their operation.
- Padlock with insulating shackle for use in low voltage 1 000 V AC 1 500 V DC: tested and validated in accordance with the electrical test IEC 60900 (2012) §5.5.3. at 5 000 V.
- More secure locking: impossible to drop the key when the shackle is open, the key remains trapped.

Features:

- · Available with a keys alike (A1 to A6) or different (Z).
- · Marking on both sides:
- 1. On one side: Standard symbol.
- 2. On the other side: area for marking user names and coordinates.
- · Padlock delivered with 2 keys.



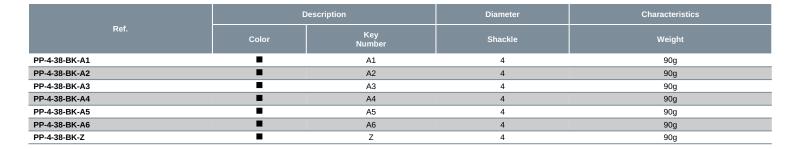



Last Modification : 07/21/2025

SICAME GROUP

UID: | TID:::11/04/2025 | SID:::11/04/2025 | Issued:11/04/2025 05:27:14 am

CATU S.A.S. - 10, Avenue Jean-Jaurès - B.P.2 - 92222 Bagneux Cedex